

TRIMDEK® PROFILE

Figure 1 displays pre-profiled cut-out dimensions. Rib cut-outs are typical of standard Lysaght TRIMDEK® ribs.

Sheet sizes can be ordered in increments of 10mm from 200mm up to 600mm in width. Sheet sizes less than 200mm are available on request.

Trimdek product dimensions:

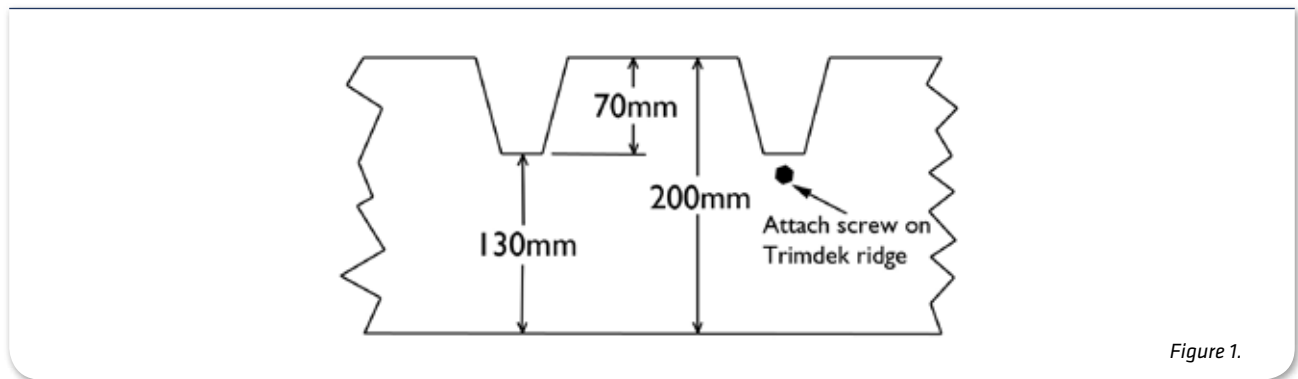


Figure 1.

Materials

- Bluescope COLORBOND® steel is available in 22 Primary Colours.
- AS 1397 Grade 300 XRW AM100
- QEMCO is an Australian brand partner of Bluescope steel who supplies our raw materials used in production.
- Aluminium: 5005-H34 - Mill finish



Material Specifications

PRODUCT CODE	STANDARD SHEET SIZE		THICKNESS (MM)	STRAND WIDTH (MM)	NOMINAL PATTERN SIZE		FREE AIR SPACE (%)	MASS (KG/M ²)	KNUCKLE WIDTH	
	LW	SW			LWM	SWM				
QE75C	1200	200	0-55	1-4	10-7	5-5	45-60	2-5	2-6	COLORBOND® STEEL
QE75A	1200	200	0-80	1-4	10-7	5-3	45	1-3	2-5	ALUMINIUM
QE105C	1200	200	0-55	1-2	6-4	3-8	26-40	2-7	2-4	COLORBOND® STEEL

Compliance

- To the current Australian Standard for the Construction of Buildings in bushfire prone area's AS 3959:2018